

Extra-Heavy Duty Fiberglass Step
CSA Approved Grade 1, ANSI Type 1A

- 300 lb Rated
- Durable non-conductive "C" channel side rail in high visibility safety yellow
- Wide 3" slip-resistant serrated aluminum steps



<u>Part No.</u>	<u>Size</u>
6903	3'
6904	4'
6905	5'
6906	6'
6907	7'
6908	8'
6910	10'
6912	12'

Extra-Heavy Duty Aluminum Extension
CSA Approved Grade 1, ANSI Type 1A

- 300 lb Rated
- "I" beam construction, 3 1/16" x 1 1/4" rails provide stability, torque resistance and high strength ratio
- Wide 3" slip-resistant serrated aluminum steps



<u>Part No.</u>	<u>Size</u>	<u>Max. Open</u>
		<u>Length</u>
3216D	16'	13'
3220D	20'	17'
3224D	24'	21'
3228D	28'	25'
3232D	32'	29'
3236D	36'	32'
3240D	40'	35'

3200 Series

Extra-Heavy Duty Fiberglass Extension
CSA Approved Grade 1, ANSI Type 1A

- 300 lb Rated
- Durable non-conductive "C" channel side rail in high visibility safety yellow
- Exclusive "-piece" foot assembly with spur wheel



<u>Part No.</u>	<u>Size</u>	<u>Max. Open</u>
		<u>Length</u>
6216D	16'	13'
6220D	20'	17'
6222D	22'	19'
6224D	24'	21'
6228D	28'	25'
6232D	32'	28'
6236D	36'	32'
6240D	40'	35'

6200 Series

Jaws Telescopic Ladder

- JLT Series - CSA Approved Grade 1, ANSI Type 1AA**
- 375 lb Rated
 - Durable non-conductive "C" channel side rail in high visibility safety yellow
 - Exclusive "-piece" foot assembly with spur wheel

<u>Part No.</u>	JLT18	JLT22	JLT26
Folder Height	4'9"	5'9"	6'9"
Extension Range	9'0" - 15'0"	11'0" - 19'0"	13'0" - 23'0"
Working Height	9'0" - 18'0"	11'0" - 22'0"	13'0" - 26'0"
Step Ladder Height	4'6" - 7'6"	5'6" - 9'6"	6'6" - 11'6"
Scaffold Height	up to 4'	up to 5'	up to 6'

Extra-Heavy Duty Aluminum Step
CSA Approved Grade 1, ANSI Type 1A

- 300 lb Rated
- Super tough copolymer top for strength and durability
- Rugged outside Zinc coated steel spreader arms



<u>Part No.</u>	<u>Size</u>
3402	2'
3403	3'
3404	4'
3405	5'
3406	6'
3408	8'
3410	10'

JLT Series



Eye And Eye Slings (Flat or Twisted)



Twisted Eye



Flat Eye

	Order Code	Web Width (in.)	Rated Capacity* (lbs.)			
			Vertical	Choker	V. Basket	
One Ply	EE1-801	1	1,600	1,250	3,200	
	EE1-802	2	3,200	2,500	6,400	
	EE1-803	3	4,800	3,800	9,600	
	EE1-804	4	6,400	5,000	12,800	
	EE1-805	5	8,000	6,400	16,000	
	EE1-806	6	9,600	7,700	19,200	
	EE1-808	8	12,800	10,200	25,600	
	EE1-810	10	16,000	12,800	32,000	
	EE1-812	12	19,200	15,400	38,400	
Two Ply	EE2-801	1	3,200	2,500	6,400	
	EE2-802	2	6,400	5,000	12,800	
	EE2-803	3	8,600	6,900	17,200	
	EE2-804	4	11,500	9,200	23,000	
	EE2-805	5	13,600	10,900	27,200	
	EE2-806	6	16,300	13,000	32,600	
	EE2-808	8	19,200	15,400	38,400	
	EE2-810	10	22,400	17,900	44,800	
		EE2-812	12	26,900	21,500	53,800



Wire Rope Slings

Part No.	Standard Eye Size (in.)	Dia. (in.)	Length (ft.)
38IEEX2	3 X 6	3/8	2
38IEEX3	3 X 6	3/8	3
38IEEX4	3 X 6	3/8	4
38IEEX6	3 X 6	3/8	6
38IEEX8	3 X 6	3/8	8
38IEEX9	3 X 6	3/8	9
38IEEX10	3 X 6	3/8	10
38IEEX12	3 X 6	3/8	12
12IEEX3	4 X 8	1/2	3
12IEEX4	4 X 8	1/2	4
12IEEX6	4 X 8	1/2	6
12IEEX8	4 X 8	1/2	8
12IEEX10	4 X 8	1/2	10

Plastic Storage Bins Akrobin



Model No.	Outside Dimensions			Inside Dimensions				Bin Load Capacity On Rack
	L	W	H	L	W	H	X	
BIN-30210	5 3/8	4 1/8	3	4 3/4	3 7/16	2 13/16	4	10 lbs.
BIN-30220	7 3/8	4 1/8	3	6 3/4	3 7/16	2 13/16	6	10 lbs.
BIN-30224	10 7/8	4 1/8	4	10 1/4	3 3/16	3 3/4	9	30 lbs.
BIN-30230	10 7/8	5 1/2	5	10 1/4	4 3/8	4 3/4	9	30 lbs.
BIN-30234	14 3/4	5 1/2	5	14 1/16	4 3/8	4 3/4	12 13/16	50 lbs.
BIN-30235	10 7/8	11	5	10 1/4	10	4 3/4	9	50 lbs.
BIN-30239	10 3/4	8 1/4	7	10	6 9/16	6 3/4	8	50 lbs.
BIN-30240	14 3/4	8 1/4	7	14	6 9/16	6 3/4	12	60 lbs.
BIN-30250	14 3/4	16 1/2	7	14	14 3/4	6 3/4	12	75 lbs.
BIN-30255	10 7/8	16 1/2	5	9 3/4	15	4 3/4	8 1/2	60 lbs.
BIN-30260	18	11	10	17 1/8	10 1/2	9 1/2	14 1/2	N/A
BIN-30265	18	8 1/4	9	17 1/8	6 3/4	8 1/4	14 1/2	N/A
BIN-30270	18	16 1/2	11	17 1/8	14 3/4	10 1/4	13 3/4	N/A

Manual Adjustable Trolleys
JET™ SBT Ball Bearing Series

• Adjustable to fit various flanges



Part No.	Cap.(lbs)	I-Beam	
		Width	Wt. (lbs)
120251	1100	3 1/4" - 8 1/32"	16
120252	2200	4" - 8 1/32"	28
120253	3300	4" - 8 1/32"	42
120254	4400	4" - 8 1/32"	46
120255	6600	4" - 8 1/32"	77
120256	11000	4 1/4" - 8 1/32"	110
120257	22000	4 5/8" - 8 1/32"	196

JET™ Hydraulic Hand Pallet Truck

Part No.
190918

Size
27" x 48" Forks

Capacity
5500 Lbs



True Temper Contractor Grade Shovels

Part No.	Handle	Description
2141	Long	Round mouth shovel
21442	D-Hdl	Round mouth shovel
2143	Long	Square mouth shovel
2144	D-Hdl	Square mouth shovel
2145	D-Hdl	Square mouth shovel
2146	D-Hdl	Square mouth shovel
2147	D-Hdl	Square garden spade



JET™ Chain Hoists
L-90 Professional
"Heavy Duty"

• Scaffold weight is 146 lbs
• Capacity is 500 lbs
• Ideal on stairwells



Part No.	Ton		Lbs. Pull		Lbs. Wt.
	Size	Lift	To Lift	Cap.	
L90-0502	1/2	10'	59	22	
L90-0504	1/2	15'	59	28	
L90-0506	1/2	20'	59	31	
L90-1002	1	10'	69	27	
L90-1004	1	15'	69	24	
L90-1006	1	20'	69	40	
L90-1502	1/2	10'	91	37	
L90-1504	1/2	15'	91	44	
L90-1506	1/2	20'	91	52	
L90-2002	2	10'	88	48	
L90-2004	2	15'	88	54	
L90-2006	2	20'	88	63	
L90-3002	3	10'	104	53	
L90-3004	3	15'	104	57	
L90-3006	3	20'	104	72	
L90-5002	5	10'	106	87	
L90-5004	5	15'	106	96	
L90-5006	5	20'	106	118	
L90-10003	10	11 1/2'	116	181	

Slotted Angles

Part No.	Description
225	DEXION




Angle Iron
Bare Metal

Part No.	Size	Wt / C'
AL114	1" x 1" x 1/4"	165 lbs
AL11414	1-1/4" x 1-1/4" x 1/4"	190 lbs
AL11214	1-1/2" x 1-1/2" x 1/4"	230 lbs
AL214	2" x 2" x 1/4"	315 lbs
AL314	3" x 3" x 1/4"	490 lbs
AL414	4" x 4" x 1/4"	660 lbs



Lathers Channel
Galvanized, 12' Lengths

Part No.	Size
LC112121	1-1/2" x 1/2"
LC112341	1-1/2" x 3/4"
LC34121	3/4" x 1/2"



Hand Trucks

- All welded tubular steel construction
- 7 gauge beveled nose plate with rounded corners for easier load pick up



<u>Part No.</u>	<u>Capacity</u>	<u>Nose Plate</u>	<u>Tire Diameter</u>	<u>Description</u>
HT300	300 lbs	8" x 14"	8"	Flow Handle, Solid Tire
HT800	800 lbs	8" x 14"	10"	Flow Handle, Solid Tire
HT65P	650 lbs	8" x 14"	10"	Flow Handle, Pneumatic Tire
HT65PL	650 lbs	8" x 14"	10"	Loop Handle, Pneumatic Tire
HTA440	400 lbs	4.9" x 24"	8"	Appliance Truck

Scaffolding

- Fits through doorways 30" and wider
- Maximum platform height 18' with outriggers
- Load capacity is 1,000 lbs
- 5/8" plywood deck




<u>Part No.</u>	<u>Description</u>	<u>Shpg. Wt.</u>
P660	Scaffold 69 1/2", 5 ring	125.0 lbs

Scaffolding Accessories

600-02	6' Guard rail kit	15.0 lbs
600-03	Outriggers 1 left and 1 right, (pair)	7.0 lbs
600-05	5" x 1.25" Locking casters	3.0 lbs

Frame Scaffolding

- Galvanized braces
- Aluminum and plywood decking.

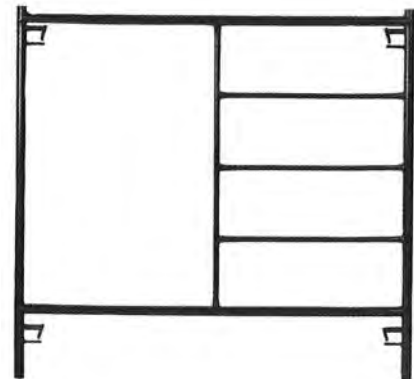

<u>Part No.</u>	<u>Description</u>	<u>Shpg. Wt.</u>
SMF6060P	Frame 5' x 5' c/w 2 Connectors	36.0 lbs
SWF7860P	Walk through frame 78' x 5' c/w 2 connectors	36.0 lbs
SAD0719	Decking aluminum / plywood 7' x 19"	32.0 lbs
SBR0704	Galvanized brace 7' x 4"	10.0 lbs
SBR1004	Galvanized brace 10' x 4"	14.0 lbs
SGR0700	Galvanized guard rail 7'	5.0 lbs
SGR1000	Galvanized guard rail 10'	12.0 lbs
SSJ24	24" Solid screw jack	12.0 lbs
SCS	Scaffold Caster 8: 2-way locking	12.0 lbs
SCP1	Frame connector 1"	0.5 lbs
SPT	Pig Tail	0.1 lbs